


# ULTRA METAL UM300

Heavy Metal Distortion Effects Pedal

Thank you for showing your confidence in us by purchasing the BEHRINGER ULTRA METAL UM300. This high-quality effects pedal comes with a dual-gain circuitry that enables you to produce super thick, tube-like distortion plus endless sustain. Thanks to its high-performance features you will achieve the most extreme and sought-after hard rock or heavy metal distortion sounds.

## 1. Controls

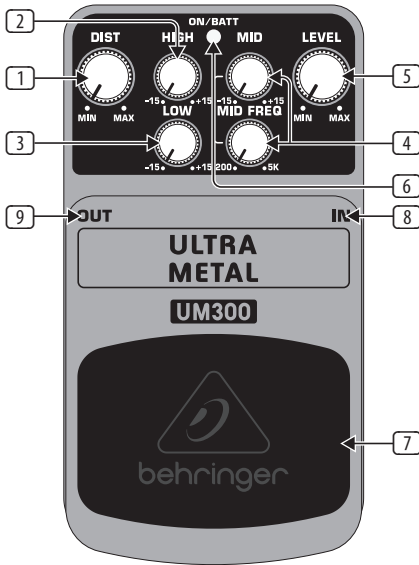

1 The **LOW** control allows you to boost/cut the lo-frequency range.

♦ Please keep in mind that extreme distortion and EQ settings will increase noise and may induce oscillation.

2 The two **MID FREQ**(uency) controls allow to boost/cut a defined mid-frequency range. The upper control is used to increase or lower the mid range, the control below adjusts the center frequency of the mid range that is affected (200 Hz to 5 kHz).

3 The **LEVEL** control adjusts the output level.

4 The **ON/BATT** LED illuminates when the effect is activated. It also serves as a battery level indicator.

5 Use the footswitch to activate/deactivate the effect.

6 Use this ¼" TS **IN** connector to plug in the instrument cable.

7 The ¼" TS **OUT** connector sends the signal to your amp.

Use the **DC IN** connection to plug in a 9 V power supply (not included).

The **BATTERY COMPARTMENT** is located underneath the pedal cover. To install or replace the 9 V battery, press the hinges with a ballpen and remove the pedal cover. Be careful not to scratch the unit.

♦ The **UM300** has no on/off switch. As soon as you insert the jack into the in connector, the **UM300** begins running. When not using the **UM300**, remove the jack from the in connector. This extends the life of the battery.

The **SERIAL NUMBER** is located at the bottom.

## 2. Safety Instructions

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, especially when power supply cord or plug is damaged.

## 3. Warranty

Please register your new BEHRINGER equipment right after your purchase by visiting <http://behringer.com> and read the terms and conditions of our warranty carefully.

## 4. Specifications

### In

Connector	¼" TS
Impedance	500 kΩ

### Out

Connector	¼" TS
Impedance	1 kΩ

### Power Supply

9 V $\overline{=}$ , 100 mA regulated

### BEHRINGER PSU-SB

USA/Canada	120 V~, 60 Hz
U.K./Australia	240 V~, 50 Hz
China/Korea	220 V~, 50 Hz
Europe	230 V~, 50 Hz
Japan	100 V~, 50 - 60 Hz
Power connector	2 mm DC jack, negative center
Battery	9 V type 6LR61
Power consumption	30 mA

### Physical/Weight

Dimensions (H x W x D)	approx. 54 x 70 x 123 mm (2.1 x 2.8 x 4.8")
Weight	approx. 0.33 kg (0.7 lbs)

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, TURBOSOUND, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd. © MUSIC Group IP Ltd. 2015 All rights reserved.