

Pioneer Dj

Multi Player

CDJ-2000NXS2


DJ Controller Hardware Diagram

To use DJ controller

When a DJ controller is connected to players using a USB cable, some performance functions of the players can be controlled by the DJ controller.

When the players are connected via PRO DJ LINK, up to 4 players can be controlled by a DJ controller.

* DJ controllers can control only the players supporting the connection feature.

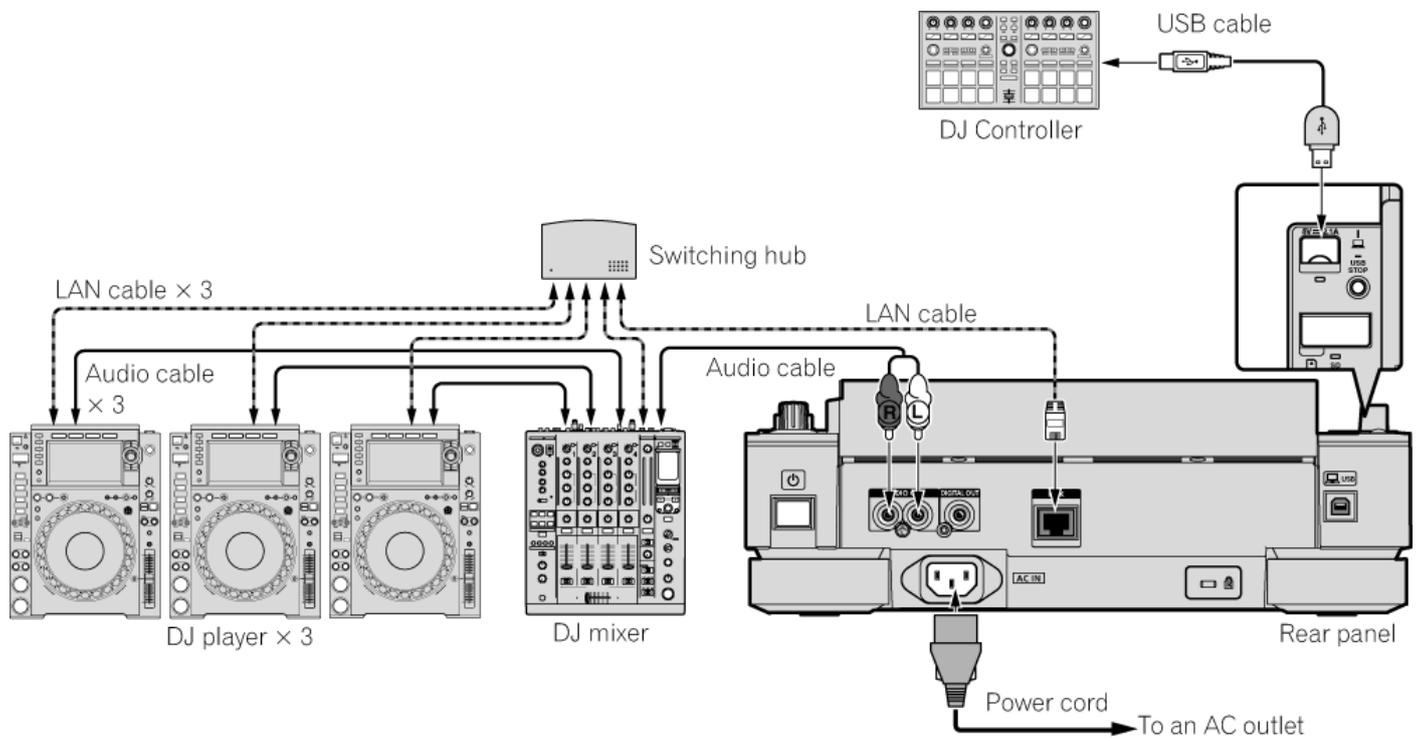

DDJ-SP1 Hardware Diagram



No.	Name	Function	(+SHIFT)	
1	DECK 3	Switch Player 1/3	-	
2	DECK 4	Switch Player 2/4	-	
3	SYNC	SYNC (Press and hold) INSTANT DOUBLES	MASTER	
4	SLIP	SLIP	QUANTIZE	
5	CENSOR	SLIP REVERSE	-	
6	AUTO LOOP	Change the Loop length 4 BEAT LOOP / LOOP EXIT	-	
No. 7 HOT CUE MODE				
9	PAD 1	Set/Play Hot Cue A	Delete Hot Cue A	
10	PAD 2	Set/Play Hot Cue B	Delete Hot Cue B	
11	PAD 3	Set/Play Hot Cue C	Delete Hot Cue C	
12	PAD 4	Set/Play Hot Cue D	Delete Hot Cue D	
13	PAD 5	Set/Play Hot Cue E	Delete Hot Cue E	
14	PAD 6	Set/Play Hot Cue F	Delete Hot Cue F	
15	PAD 7	Set/Play Hot Cue G	Delete Hot Cue G	
16	PAD 8	Set/Play Hot Cue H	Delete Hot Cue H	
No. 8	ROLL MODE	AUTO BEAT LOOP	SLIP BEAT LOOP	
9	PAD 1	1/4 beat	1/16 beat	-
10	PAD 2	1/2 beat	1/8 beat	-
11	PAD 3	1 beat	1/4 beat	-
12	PAD 4	2 beats	1/2 beat	-
13	PAD 5	4 beats	1 beat	-
14	PAD 6	8 beats	2 beats	-
15	PAD 7	16 beats	1/3 beat	-
16	PAD 8	32 beats	3/4 beat	-